


# VEHICLE TESTING TECHNOLOGY SIDE-SLIP TESTER

**C\_MINC 2.5**  
VP 220015

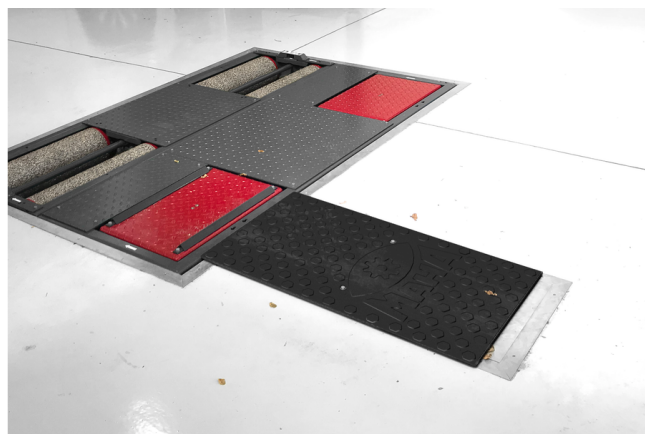

**C\_MINC 2.5**  
VP 220015

The side-slip tester MINC-PROFI ensures that the axle geometry is inspected within seconds once the test vehicle passes over it as well as a fully automatic evaluation of the deviation in m/km. The display of the measured values is via the web client of the CONNECT series.

## PRODUCT DETAILS/ACCESSORIES

### Description:

Side-slip tester, checks the axle geometry within seconds while passed over by vehicle up to 2.5 t axle load

Specially suitable for car reception and diagnostic test lanes

Fully automatic evaluation of deviation in m/km

In combination with CONNECT Web client:  
Automatic display on respective terminal device

device, PC, ( ) when vehicle drives onto tester,

including evaluation in m/km

### Design:

- Side-slip tester C\_MINC 2.5
- Self-supporting frame with movable test plate incl. vulcanised rubber pad
- High-quality powder coating: anthracite grey, RAL 7016

### Scope of delivery:

- Side-slip tester C\_MINC 2.5 floor assembly
- Prepared for connection to CONNECT test lane
- Plug-in cable harness with 3 m total length for connection with C\_MBT floor assembly

## TECHNICAL DATA

Axle load	2500 kg
Measurement range	+/- 20 m/km
Test speed	5 - 7 km/h
Floor assembly dimensions (H x W x L)	80 x 1020 x 460 mm

## ACCESSORIES

VZ 935307 Cable harness extension 10 m for C\_MINC series

### SUPPLEMENTARY CHARGES

VT 995030 Transport costs MINC up to 4.0 t axle load

VM 995031 Installation costs incl. briefing and calibration  
MINC up to 4.0 t axle load